


## ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

1. Thread 2 mounting screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
2. Attach the cross bar to outlet box using 2 outlet box screws upwards.
3. Make wire connections:
  - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
  - Attach white wire from light to white wire from power source with a wire nut.
  - Attach black wire from light to black wire from power source with a wire nut.**Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.**
4. Tuck the wire connections neatly into the outlet box.
5. Attach the fixture body to the ceiling and let the 2 mounting screws pass through the 2 pre-drilled holes on the canopy and fix it in place by ball nuts.
6. Put glass shade onto the fixture frame and secure it .
7. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
8. Turn on the power at fuse or circuit box.

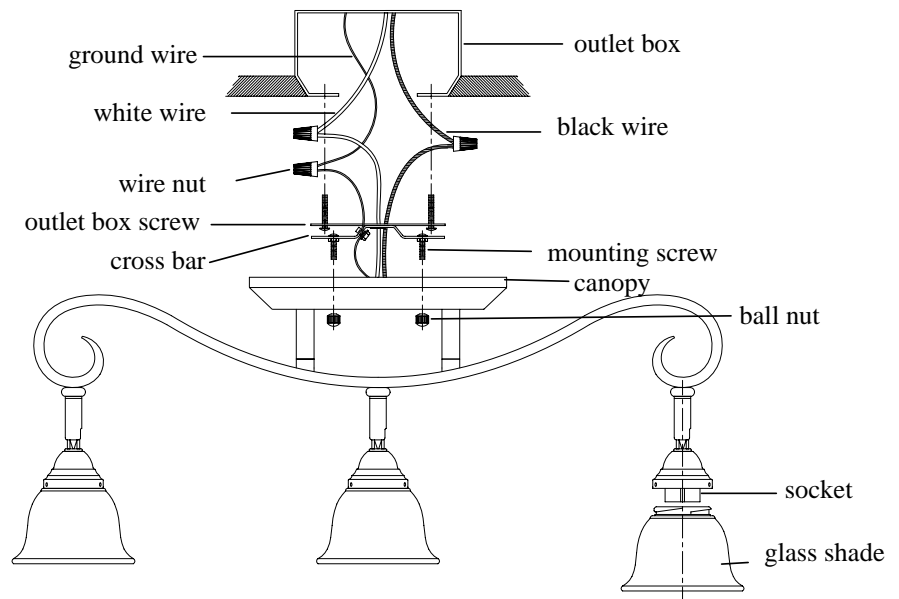

3853-3-64

3853-3-86

3853-4-64

3853-4-86